



STIRRUP STRAP, MOD. OF 1928 (A)
 RUSSET HARNESS LEATHER, MEDIUM
 5/8 INCH THICK (PLUS OR MINUS 6/32)
 2-REQD FOR McCLELLAN SAD, MOD. OF 1928, CAK

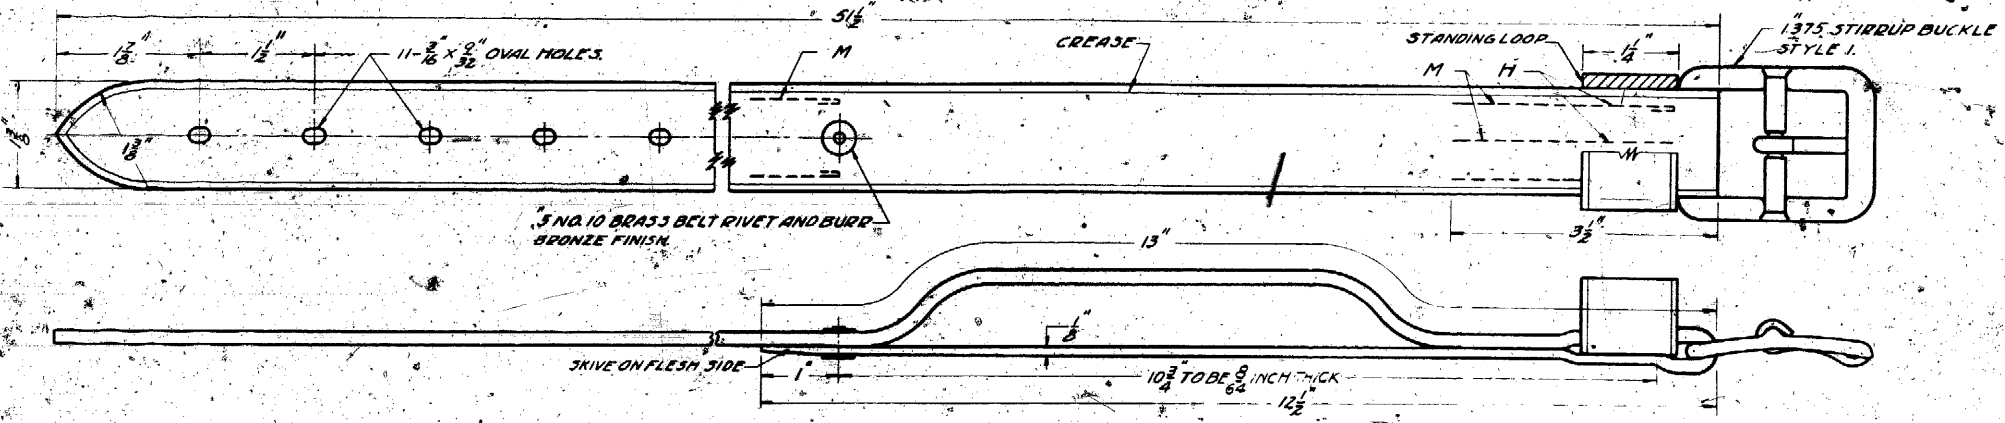

STIRRUP STRAP, MOD. OF 1904 (B)
 RUSSET HARNESS LEATHER, MEDIUM
 5/8 INCH THICK (PLUS OR MINUS 6/32)
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. LEAD, NEAR.
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. LEAD, OFF.
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. WHEEL, NEAR.
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. WHEEL, OFF.
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, F.A. IND. MOUNT.

CONT.
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. ASSEMB. FOR "APPARATUS, LEADING, VET."
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. ASSEMB. FOR "HAR. WAGON, PONTON, 6 MULE"

NOTE
 MACHINE STITCHING, MARKED "M" TO BE DONE WITH 6 CORD, BROWN LINEN, MACHINE THREAD, WAXED, 6 STITCHES TO THE INCH. LOCK STITCH METHOD OF STITCHING SHALL BE USED.
 HAND STITCHING, MARKED "H" TO BE DONE WITH 3 CORD NO. 10, BROWN LINEN, SHOE THREAD, WAXED, 6 STITCHES TO THE INCH.

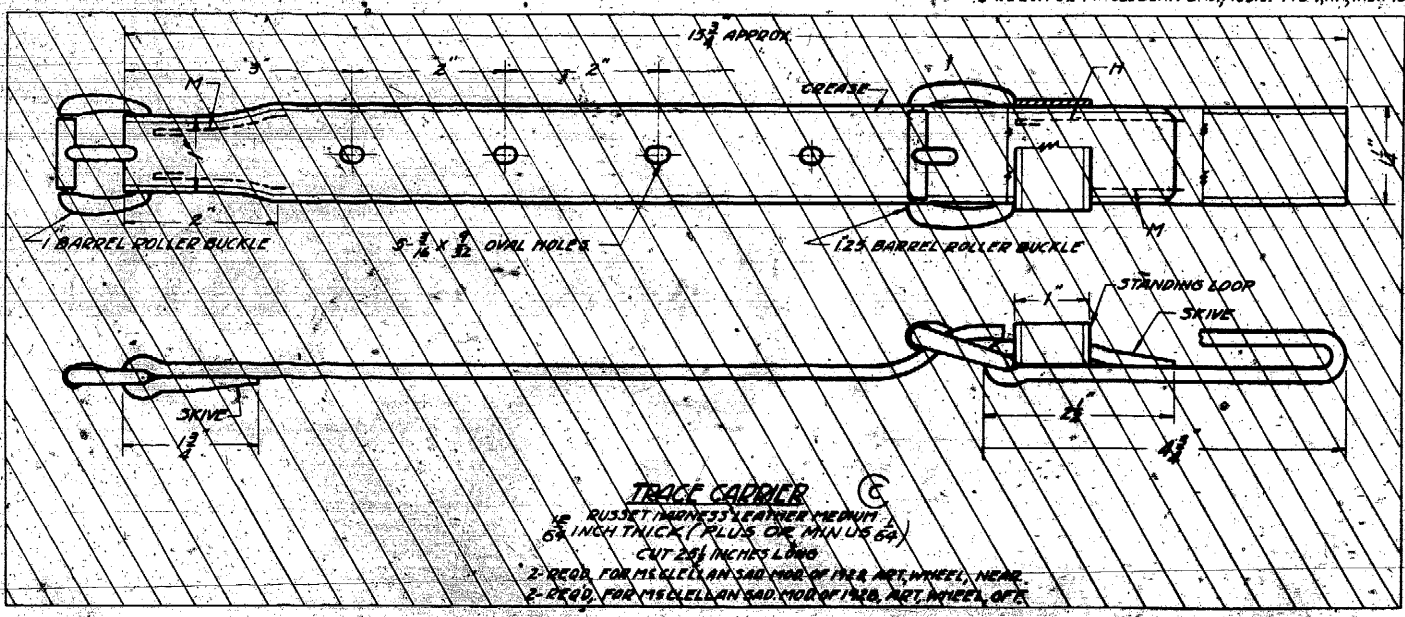

TRACE CARRIER (C)
 RUSSET HARNESS LEATHER, MEDIUM
 5/8 INCH THICK (PLUS OR MINUS 6/32)
 CUT 20 1/2 INCHES LONG
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. WHEEL, NEAR.
 2-REQD. FOR McCLELLAN SAD, MOD. OF 1904, ART. WHEEL, OFF.

LIST OF DRAWINGS		DRAWING NOS
STRAPS, STIRRUP; M-1904, M-1928.		1-1-44
BUCKLES, SPECIAL "A"		4-1-17
BUCKLES, BARREL ROLLER		4-1-30
RIVETS, CAP AND BURRS		4-1-22

SUPERSEDES ORDNANCE DRG. NO. 20-18-9				WAR DEPARTMENT	
DRAWING PERTAINS TO		REVISIONS		QUARTERMASTER CORPS	
NO	DATE	NO	DATE	JEFF. Q.M. DEPT.	
		1	OCT 15-37		
				STRAPS, STIRRUP; M-1904, M-1928.	
SCALE		DATE			
FULL SIZE		JUNE 16, 1933.			
DRAWN BY	TRACED BY	CHECKED BY	CH. DRYTTON		
R. MILLER	R. MILLER	R. CENTER			
APPROVED FOR P.M.C.		APPROVED FOR P.M.C.			
J. C. DICKSON		J. C. DICKSON			
SUPERVISOR		SUPERVISOR			
SPECIFICATION NO.		M.M. G.R.C.			
DRAWING NO.				1-1-44	